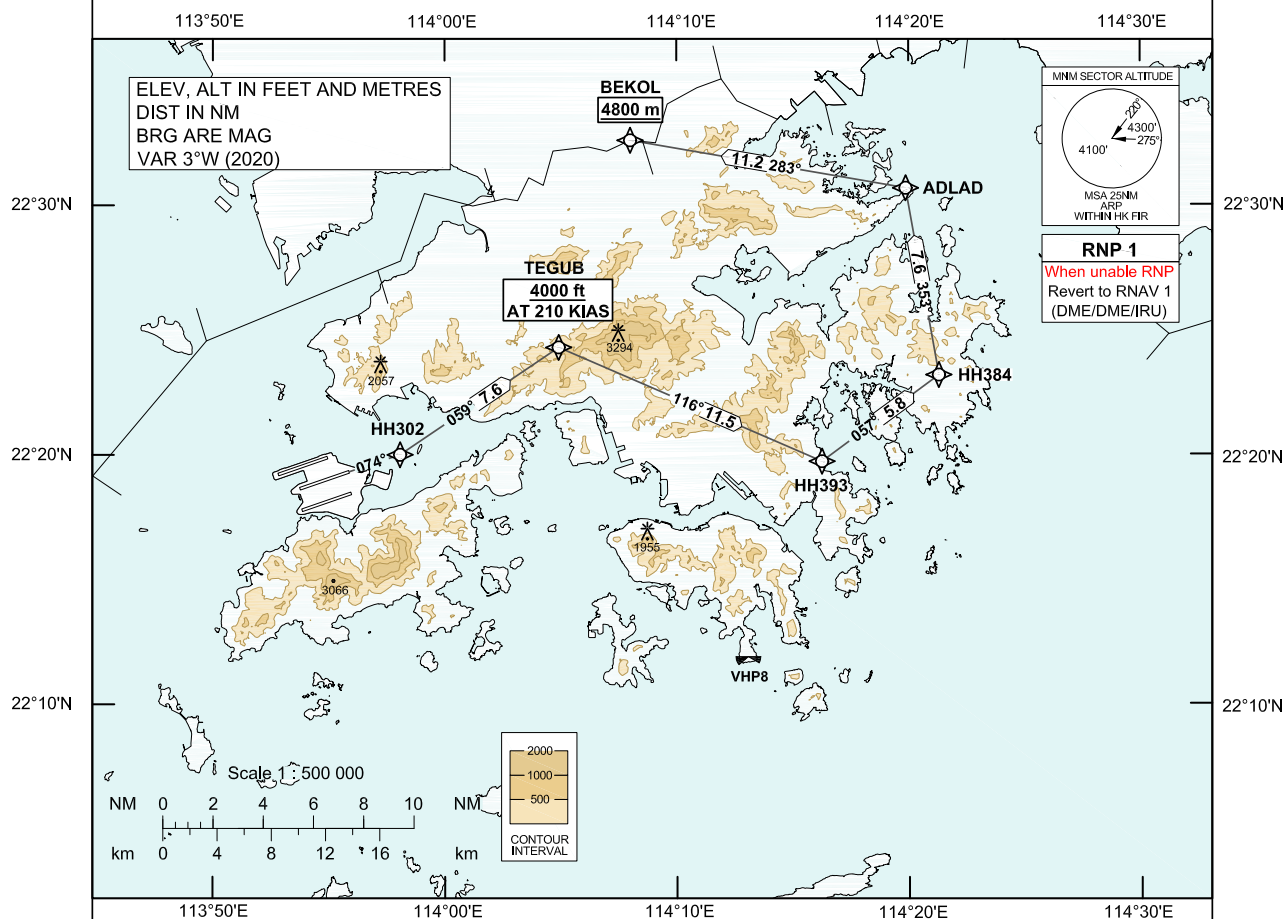


**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

Transition Altitude 9 000 ft
Hong Kong Tower 118.2
Hong Kong Departure 123.8

**HONG KONG / Intl (VHHH)
RNAV ADLAD 1T SID RWY 07C**

- Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. See VHHH AD 2.22 para 2.2.3.1 for contingency procedures.

**ADLAD 1T SID RWY 07C****CLIMB REQUIREMENT**

Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

TERRAIN CLEARANCE

Minimum climb gradient of 6.8% (414 ft/NM) until passing 3 900 ft is required.

SPEED RESTRICTION

Speed restriction of 210 KIAS at TEGUB.

UNABLE RNP (E.G. LOSS OF GNSS) PROCEDURE

- Revert to RNAV 1 (DME/DME/IRU) and inform ATC
- Continue on assigned SID
- Critical DME: TD required

CHANGE: Editorial & Reversion Procedure.

AD 2-VHHH-SID-ADLAD-T_V02_260323km

FMC Database Coding Reference for Hong Kong RNAV SID**TABULAR DESCRIPTION: ADLAD 1T RWY 07C**

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH302	-	074 (071)	+3.0	-	-	-	-	RNP 1/ RNAV 1
02	TF	TEGUB	-	059 (056)	+3.0	7.6	-	+4000	@210	RNP 1/ RNAV 1
03	TF	HH393	-	116 (113)	+3.0	11.5	-	-	-	RNP 1/ RNAV 1
04	TF	HH384	-	057 (054)	+3.0	5.8	-	-	-	RNP 1/ RNAV 1
05	TF	ADLAD	-	353 (350)	+3.0	7.6	-	-	-	RNP 1/ RNAV 1
06	TF	BEKOL	-	283 (280)	+3.0	11.2	-	+4800m	-	RNP 1/ RNAV 1

WAYPOINT LIST

ADLAD 1T RWY 07C		
Waypoint Identifier	Coordinates (WGS-84)	
HH302	22 20 00.43N	113 58 04.56E
TEGUB	22 24 18.28N	114 04 54.69E
HH393	22 19 43.83N	114 16 15.26E
HH384	22 23 11.51N	114 21 17.83E
ADLAD	22 30 40.74N	114 19 52.57E
BEKOL	22 32 36.00N	114 08 00.00E