
STANDARD DEPARTURE CHART-INSTRUMENT (SID) - ICAO

Transition Altitude 9 000 ft

Hong Kong Tower	118.4
Hong Kong Departure	122.0

HONG KONG / Intl (VHHH)
RAMEN 2A SID RWY 07R

1. DME is required.
2. To maintain terrain clearance, **DO NOT** turn right before passing PORPA (IZSR D7.0).

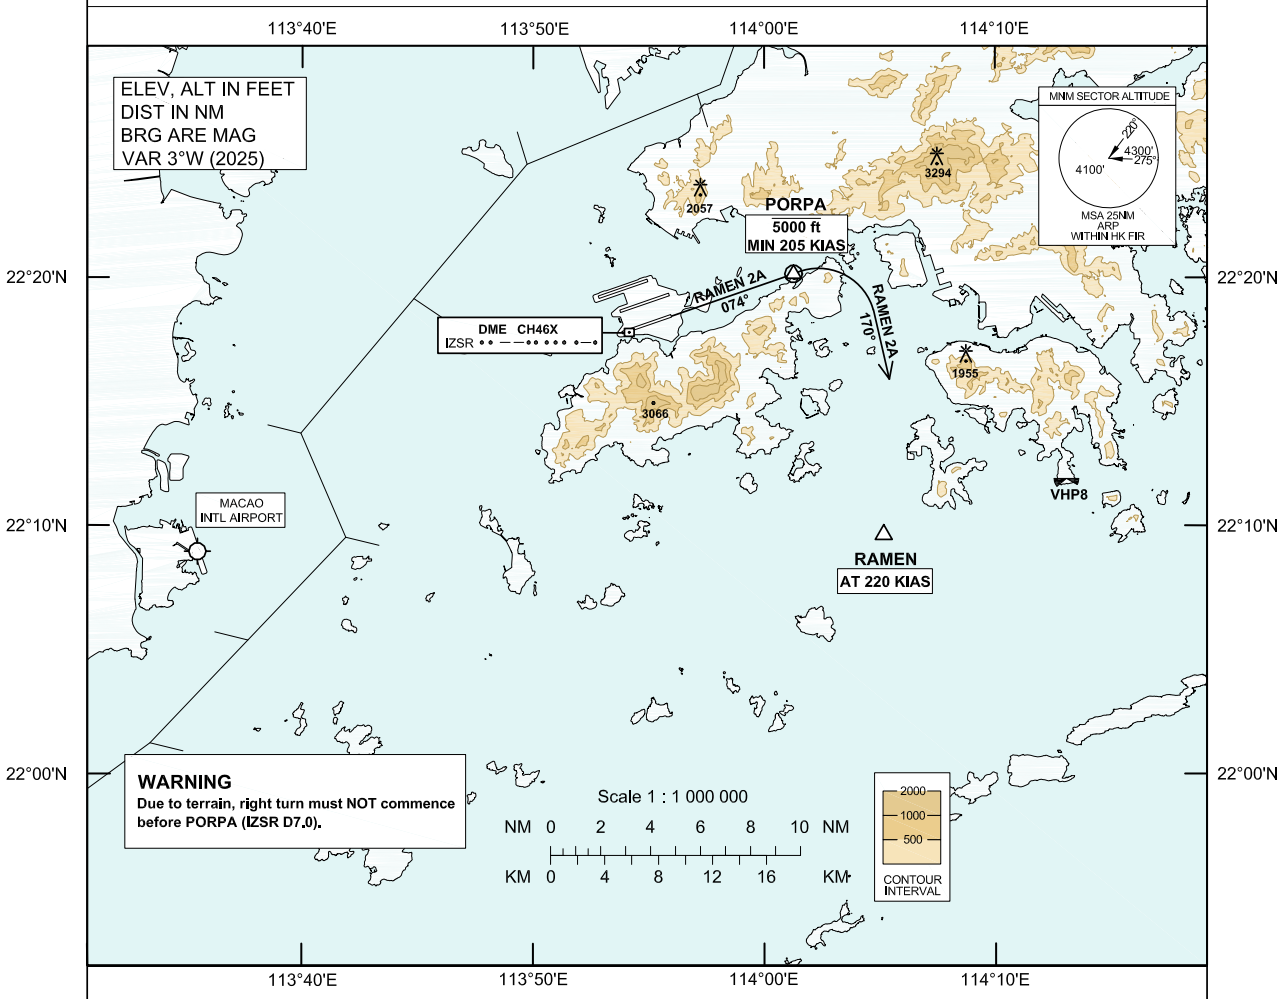

RAMEN 2A SID RWY 07R

CONVENTIONAL PROCEDURE
Track 074° to PORPA (IZSR D7.0). At PORPA, turn right track 170°, request radar vectors to RAMEN.

CLIMB REQUIREMENT
Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Cross PORPA at 5 000 ft or below.

TERRAIN CLEARANCE
Minimum climb gradient of 4.9% (298 ft/NM) until leaving 1400 ft is required.

SPEED RESTRICTION
Speed restriction of 205 KIAS or greater at PORPA and 220 KIAS until RAMEN.

CHANGE: Magnetic variation version and editorial.

AD 2-VHHH-SID-RAMEN-A_V02_260702km

RWY 07R RAMEN 2A DEPARTURE

NAVIGATION AIDS

Navaid/Ident	Frequency	Coordinates	Remarks
DME/IZSR	CH 46X	22 17 47.78N 113 54 09.48E	

WAYPOINT LIST

RAMEN 2A RWY 07R			
Waypoint Identifier	**Coordinates (WGS-84)**		**Cross Reference from Navaid**
PORPA	22 20 09.10N	114 01 16.30E	IZSR DME 7.0 NM
RAMEN	22 09 39.22N	114 05 09.89E	-