
STANDARD DEPARTURE CHART-INSTRUMENT (SID) - ICAO

Transition Altitude 9 000 ft	
Hong Kong Tower	118.4
Hong Kong Departure	122.0

HONG KONG / Intl (VHHH)
RNAV BEKOL 3B SID RWY 25L

1. Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. See VHHH AD 2.22 para 2.2.3.1 for contingency procedures.

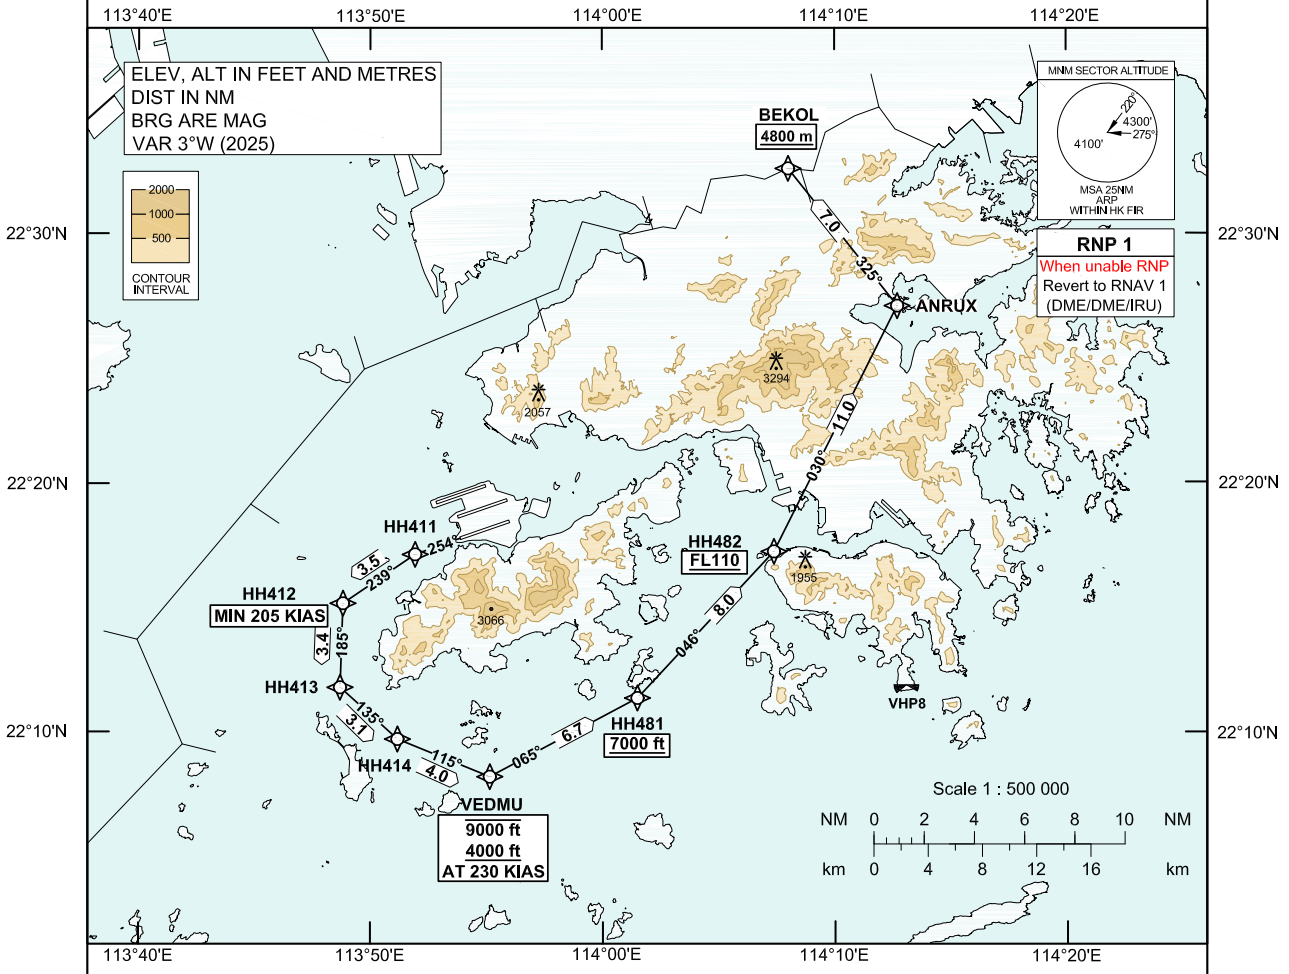

BEKOL 3B SID RWY 25L

CLIMB REQUIREMENT
Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

TERRAIN CLEARANCE
Minimum climb gradient of 4.7% (286 ft/NM) until passing 1 600 ft is required.

SPEED RESTRICTION
Speed restriction of 205 KIAS or greater at HH412 and 230 KIAS until VEDMU.

UNABLE RNP OR LOSS OF GNSS PROCEDURE
- Revert to RNAV 1 (DME/DME/IRU) and inform ATC
- Continue on assigned SID
- Critical DME: TD required

CHANGE: Magnetic variation version and editorial change.

AD 2-VHHH-SID-BEKOL-B_V03_260616h

FMC Database Coding Reference for Hong Kong RNAV SID

TABULAR DESCRIPTION: BEKOL 3B RWY 25L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH411	-	254 (251)	+3.0	-	-	-	-	RNP 1/ RNAV 1
02	TF	HH412	-	239 (236)	+3.0	3.5	-	-	+205	RNP 1/ RNAV 1
03	TF	HH413	-	185 (182)	+3.0	3.4	-	-	-	RNP 1/ RNAV 1
04	TF	HH414	-	135 (132)	+3.0	3.1	-	-	-	RNP 1/ RNAV 1
05	TF	VEDMU	-	115 (112)	+3.0	4.0	-	-9000 +4000	@230	RNP 1/ RNAV 1
06	TF	HH481	-	065 (062)	+3.0	6.7	-	+7000	-	RNP 1/ RNAV 1
07	TF	HH482	-	046 (043)	+3.0	8.0	-	+FL110	-	RNP 1/ RNAV 1
08	TF	ANRUX	-	030 (027)	+3.0	11.0	-	-	-	RNP 1/ RNAV 1
09	TF	BEKOL	-	325 (322)	+3.0	7.0	-	+4800m	-	RNP 1/ RNAV 1

WAYPOINT LIST

BEKOL 3B RWY 25L

Waypoint Identifier	Coordinates (WGS-84)	
HH411	22 17 08.52N	113 51 55.32E
HH412	22 15 10.92N	113 48 48.95E
HH413	22 11 48.90N	113 48 41.37E
HH414	22 09 44.51N	113 51 09.66E
VEDMU	22 08 14.02N	113 55 08.18E
HH481	22 11 23.11N	114 01 29.60E
HH482	22 17 15.28N	114 07 22.59E
ANRUX	22 27 05.73N	114 12 41.76E
BEKOL	22 32 36.00N	114 08 00.00E