
STANDARD DEPARTURE CHART-INSTRUMENT (SID) - ICAO

Transition Altitude 9 000 ft

Hong Kong Tower	118.7
Hong Kong Departure	123.8

HONG KONG / Intl (VHHH)
RNAV BEKOL 2E SID RWY 07L

1. Only specific categories of flights (e.g. SAR) as stated in GEN 1.5 para 3.5.3.5 are exempted from the RNP 1 requirement. See VHHH AD 2.22 para 2.2.3.1 for contingency procedures.

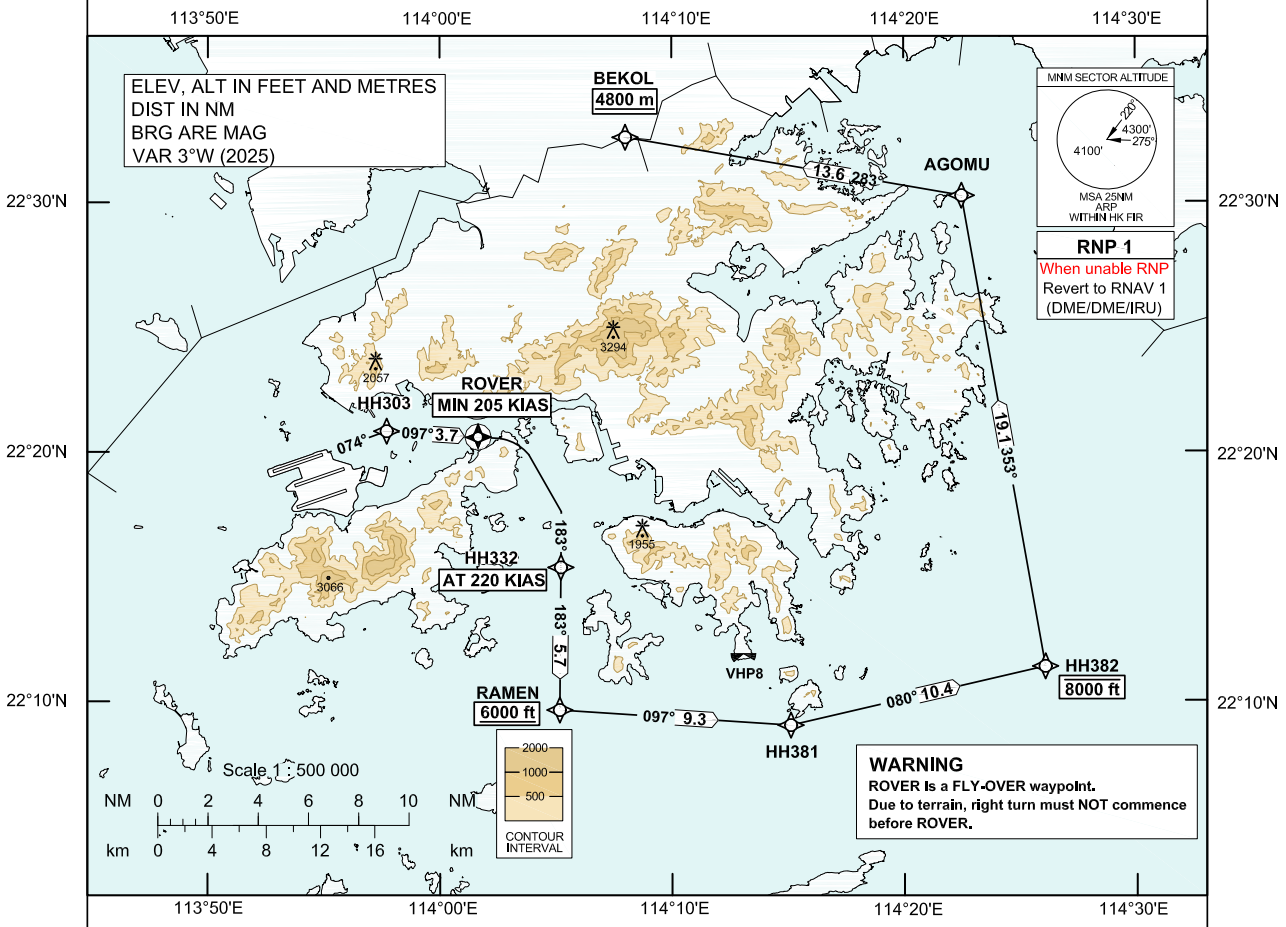

BEKOL 2E SID RWY 07L

CLIMB REQUIREMENT

Initial climb to 5 000 ft. Expect further climb when instructed by ATC. Comply with all the published altitude restrictions. If unable to comply with the vertical profile, pilot shall inform ATC prior to start-up.

TERRAIN CLEARANCE

Minimum climb gradient of 3.3% (201 ft/NM).

SPEED RESTRICTION

Speed restriction of 205 KIAS or greater at ROVER and 220 KIAS until HH332.

UNABLE RNP OR LOSS OF GNSS PROCEDURE

- Revert to RNAV 1 (DME/DME/IRU) and inform ATC
- Continue on assigned SID
- Critical DME: TD required

CHANGE: Magnetic variation version and editorial change.

AD 2-VHHH-SID-BEKOL-E_V03_260616h

FMC Database Coding Reference for Hong Kong RNAV SID

TABULAR DESCRIPTION: BEKOL 2E RWY 07L

Serial Number	Path Descriptor	Waypoint Identifier	Fly-over	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (ft)	Speed (KIAS)	Navigation Specification
01	CF	HH303	-	074 (071)	+3.0	-	-	-	-	RNP 1/ RNAV 1
02	TF	ROVER	Y	097 (094)	+3.0	3.7	-	-	+205	RNP 1/ RNAV 1
03	CF	HH332	-	183 (180)	+3.0	-	R	-	@220	RNP 1/ RNAV 1
04	TF	RAMEN	-	183 (180)	+3.0	5.7	-	+6000	-	RNP 1/ RNAV 1
05	TF	HH381	-	097 (094)	+3.0	9.3	-	-	-	RNP 1/ RNAV 1
06	TF	HH382	-	080 (077)	+3.0	10.4	-	-8000	-	RNP 1/ RNAV 1
07	TF	AGOMU	-	353 (350)	+3.0	19.1	-	-	-	RNP 1/ RNAV 1
08	TF	BEKOL	-	283 (280)	+3.0	13.6	-	+4800m	-	RNP 1/ RNAV 1

WAYPOINT LIST

BEKOL 2E RWY 07L

Waypoint Identifier	Coordinates (WGS-84)	
HH303	22 20 50.02N	113 57 42.83E
ROVER	22 20 35.58N	114 01 39.12E
HH332	22 15 22.17N	114 05 13.00E
RAMEN	22 09 39.22N	114 05 09.89E
HH381	22 09 02.10N	114 15 06.66E
HH382	22 11 23.06N	114 26 04.39E
AGOMU	22 30 15.17N	114 22 29.86E
BEKOL	22 32 36.00N	114 08 00.00E